


DESCRIPTION: Straight Coil Loop Insert

APPLICATION: The Straight Coil Loop Insert is a cast in place insert, which provides internal, coil threads in the concrete. These inserts are used for lifting precast concrete items, as well as the application of bridge overhang brackets.

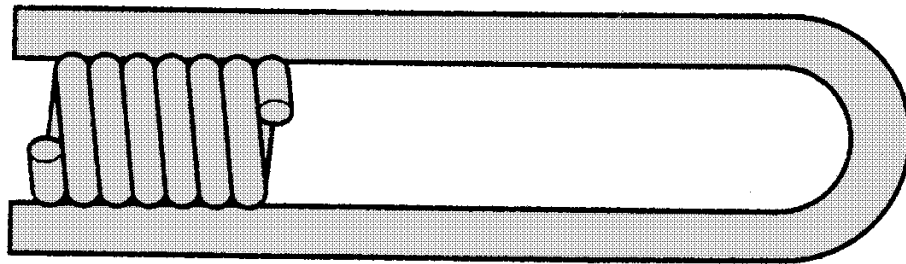

Bolt Diameter X Insert Length	SAFE WORK LOAD 4:1 SAFETY FACTOR	WIRE DIA.	MINIMUM EDGE DISTANCE
1/2" X 4"	2,250 LBS.	.223	5"
1/2" X 6"	3,600 LBS.	.306	7"
3/4" X 4"	2,250 LBS.	.223	5"
3/4" X 6"	3,750 LBS.	.306	7"
1" X 6"	3,750 LBS.	.306	7"
1" X 8"	3,750 LBS.	.306	9"

SPECTRUM CONCRETE PRODUCTS

Chino, CA

Phone: 909.590.0066

Fax: 909.590.0061

