



# FERRULE LOOP INSERT


## STRAIGHT INSERT — TECHNICAL DATA SHEET

### DESCRIPTION:

Straight Ferrule Loop Insert

### APPLICATION:

The Straight Ferrule Loop Insert is a cast-in-place insert, which provides internal N.C. threads in the concrete. Used with a plastic threaded setting plug they can be attached to.

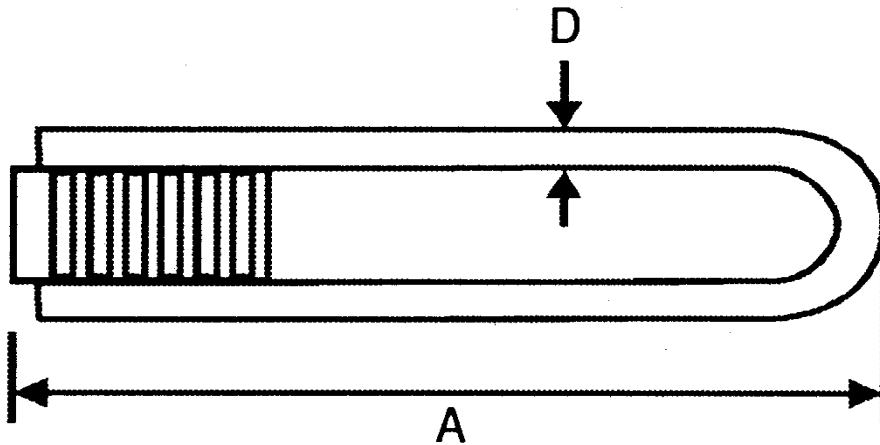

DESCRIPTION		S.W.L. (LBS.)	WIRE DIA. (D)	WEIGHT / 100LBS.
SIZE	A			
1/2" X 4"	4-1/8"	3,000	0.225	25
1/2" X 6"	6-1/8"	5,000	0.306	38
5/8" X 4"	4-1/8"	3,000	0.225	35
5/8" X 6"	6-1/8"	5,000	0.306	48
3/4" X 4"	4-1/8"	3,000	0.225	54
3/4" X 6"	6-1/8"	5,000	0.306	67
7/8" X 6"	8-1/8"	5,000	0.306	75
1" X 6"	6-1/8"	5,000	0.306	75
1" X 8"	8-1/8"	5,000	0.306	103
<b>SAFE WORKING LOAD IS APPROX. BASED ON A 2:1 SAFETY FACTOR</b>				
<b>3,000PSI NORMAL WEIGHT CONCRETE</b>				

