


DESCRIPTION:

Standard and High Strength Snapties are made from high tensile wires; which have integral heads formed on each end, and are used in concrete wall forming. Waterseal Snapties are equipped with a neoprene washer at the center of the tie.

APPLICATION:

Waterseal Snapties are used to prevent water seepage along the tie.

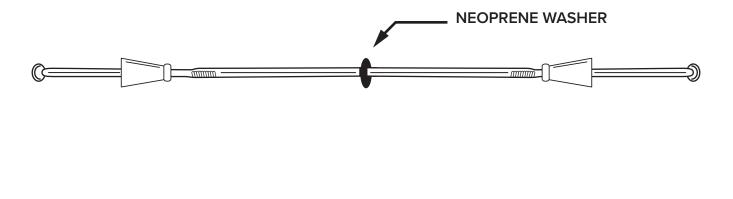

STANDARD SNAPTIE	HIGH STRENGTH SNAPTIE
S.W.L. 2,250 LBS.	S.W.L. 3,250 LBS.
S.W.L IS APPROX. BASED ON A 2:1 SAFETY FACTOR	

SpectrumConcreteUSA.com

